Test Report No.: 01 220 CHN/T-2605246

Test Report

Client:	SAKY STEEL CO., LIMITED
Client address:	709 Edunburgh Tower NO.139 Hengxi Road Minhang District Shanghai China
Contact information:	Tel.: / Mail: Info@sakysteel.com, qc@sakysteel.com
Sample No.:	SHM20260805246
Sample receiving date:	Aug.25, 2026
Testing period:	Aug.25, 2026~Aug.31, 2026

For and on behalf of
TÜV Rheinland (Shanghai) Co., Ltd.

Aug.31, 2026	Yixiang Shen Metal Materials Lab Senior Technical Manager
Date	Name

This test report is issued by the company subject to its General Terms and Conditions of Business. The test results in this report are valid for the samples tested only. Without permission of company under signed, the report shall not be copied or partially copied.
TÜV Rheinland (Shanghai) Co., Ltd. 1/F. of No.10, Lane 777, West Guangzhong Road, Jing'an District, Shanghai 200072, P.R. China
Tel.: +86 21 6108 1188 Fax: +86 21 6108 1099 Mail: service-qc@tuv.com Web: www.tuv.com
Unless otherwise specified, the location of performance of the laboratory activities is the same as the address of the company listed above.

Test Report No.: 01 220 CHN/T-2605246

1. Sample information (provided by customer):

Sample name:	Stainless steel sheet
Sample description:	A piece of steel sheet
Sample obtaining method:	☑ Sending by customer ☐ Sampling by TÜV staffs ☐ Other ( )
Other information:	Product specification: 3.2*200*360 mm; Product or Lot No.: SAKY26070151966; Material and Mark: 17-4PH 630 H1025.

Sample photo(s):

This test report is issued by the company subject to its General Terms and Conditions of Business. The test results in this report are valid for the samples tested only. Without permission of company under signed, the report shall not be copied or partially copied.

2. Test result:

2.1 Tensile test:

Test method: ASTM A370-26 Control Method C

Test item	Tensile strength (N/mm^2)	Yield strength (0.2% offset) (N/mm^2)	Elongation after fracture, (%), (Gauge length G=50mm)
Result	1170	1110	11

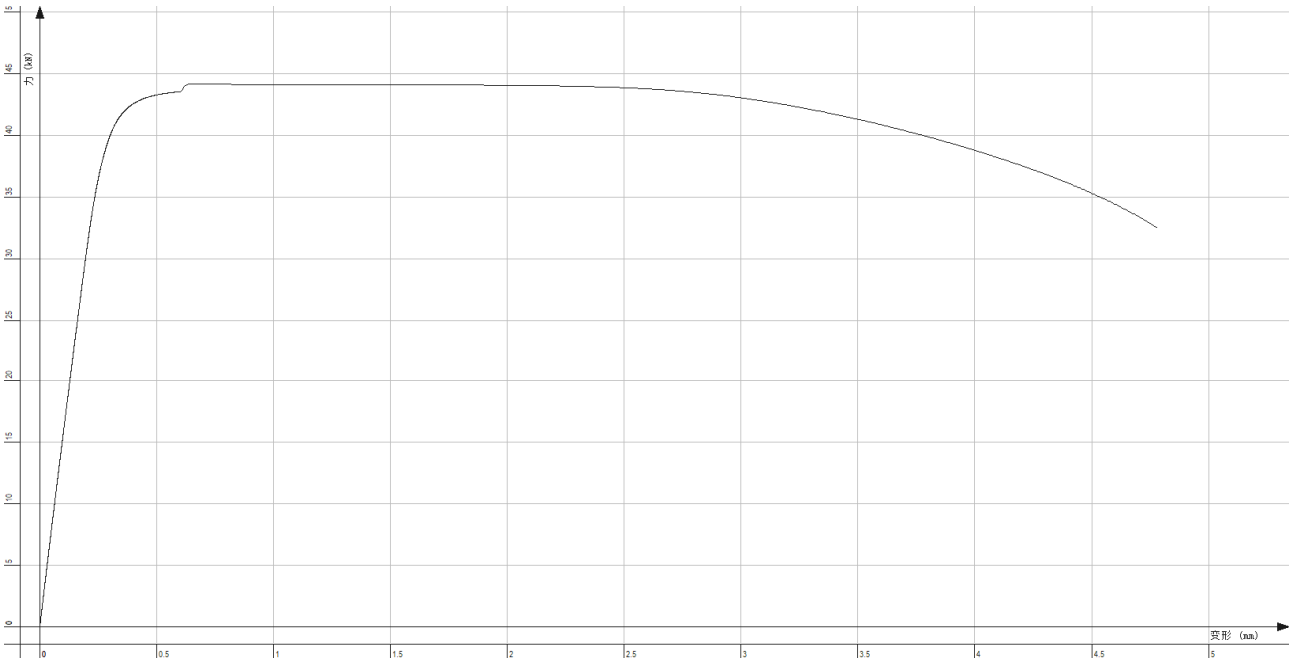

Test curve

2.2 Hardness test:

Test method: ASTM A370-26

Hardness scale	Test position	Result		
HRC	Near surface	38.9	38.4	39.0

--- END ---

This test report is issued by the company subject to its General Terms and Conditions of Business. The test results in this report are valid for the samples tested only. Without permission of company under signed, the report shall not be copied or partially copied.
TÜV Rheinland (Shanghai) Co., Ltd. 1/F. of No.10, Lane 777, West Guangzhong Road, Jing'an District, Shanghai 200072, P.R. China
Tel.: +86 21 6108 1188 Fax: +86 21 6108 1099 Mail: service-qc@tuv.com Web: www.tuv.com
Unless otherwise specified, the location of performance of the laboratory activities is the same as the address of the company listed above.